


AccuMaxTM

RAPID DEPLOYMENT FOAM SYSTEMS

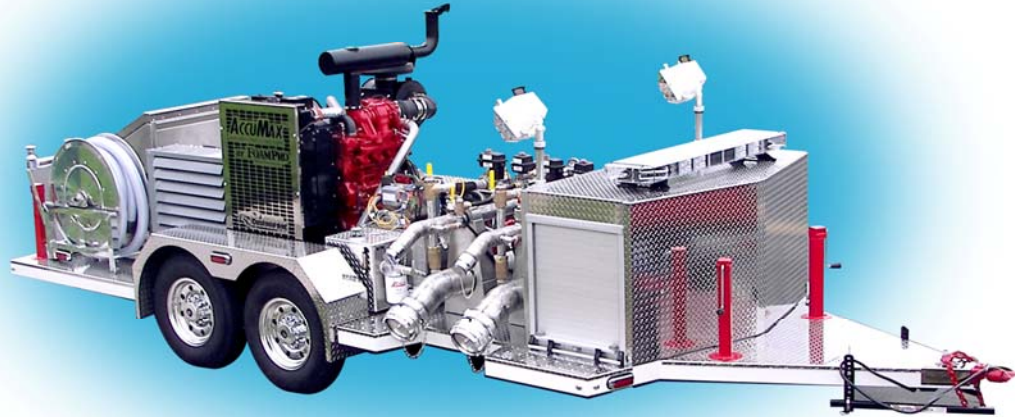

SPECIFICATIONS

AccuMax Proportioning System:

- AccuMax System 3300
 - Edwards rotary gear foam concentrate pump
 - 300 gpm @ 250 psi
 - Capable of 5000 gpm of 6% solution
 - 3" Stainless steel foam intake piping
 - Three (3) Akron Model 8830, bronze 3" ball style swing-out foam intake gate valves
 - AccuMax Line Controls - Ultra-bright LED
 - Master control providing gpm, psi, total water, total foam used
 - Four (4) Individual Line Controllers providing gpm, psi, total water, foam used
- Flow Manifolds:
 - Two (2) schedule 40 stainless 3" manifolds with 3" connectors
 - 2 - 1/2" relief valves
 - Two (2) 3" Akron ball valves with crank handle
 - Two (2) schedule 10 stainless 6" manifolds with 6" Storz connectors
 - 2 - 1/2" relief valves
 - Two (2) 6" Akron butterfly valves with crank handle

Engine:

- John Deere 4 cylinder diesel 155 horsepower @ 2400 rpm
- Air cleaner kit
- Complete cooling system

Trailer:

- NFPA 1901 compliant
- Dimensions: (8'×22.5') overall weight = 8000 lbs. tongue weight = 800 lbs.
- Dexter Torflex tandem axels: 12,000 pound total capacity (6000 lbs. each)
- Nev-R-Lube hub bearing cartridges
- 2" x 12" electric brakes
- Alcoa aluminum 16" wheels
- Four (4) Bulldog stabilizing jacks, 5000 lb. lift capacity (8000 lb. support capacity)
- Flat deck platform, embossed stainless steel diamond plating
- Ergonomic operation console with hinged stainless enclosure
 - John Deere Information Center
 - Instruments: rpm, hour meter, load %, temp, oil pressure, voltage, ignition, system check lights, three position run switch, hydraulic line pressure, hydraulic charge pressure, hydraulic temp, fuel gauge
 - Cole Hersee Model 75908, 300-amp two-position battery switch
 - Kussmaul Model 091-56-12 on-board battery charger – 15 amp
 - AccuMax Digital Controls - Ultra-bright LED
- LED trailer lighting, tail/stop, turn, and marker
 - Four (4) Truck-Lite Model 44042C, 4" LED grommet mount under body
 - Combination stop/turn signal lights
- Fulton Brand 2 - 5/16 " ball-style hitch coupler
- Full width transverse locker/compartament
 - ROM Robinson white roll-up shutter style doors, satin finish
 - Two (2) Truck-Lite Model 44042, 4" LED base mount 12-volt lights
 - Slide Master dual direction multi-section roller slide
- Two (2) Hannay Model 9324 with 25' of 3" diameter maxi-flex flexible suction hoses
- Custom-built 30 gallon diesel fuel tank
- Hydraulic fluid cooler
- Whelen warning light bar and system
- Reflective perimeter stripping
- Two (2) Fire Research Night Master model LTA510DT 12-volt, 25A, 250W extendable scene lights

Custom configurations available to meet your specifications and requirements

For more details on taking your attack to the Max – Call 800-533-9511